



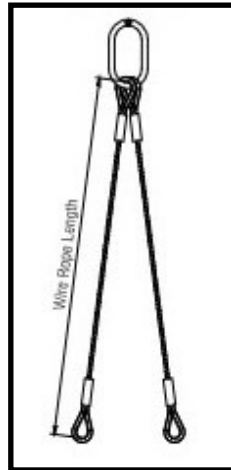

Combination of Multiple Leg Slings

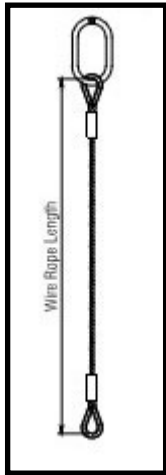

WIRE ROPE SLING CAPACITY

WIRE ROPE IMPROVED PLOW STEEL – IWRC – 6 X 19, 6 X 36 AND 8 X 36 FITTED TURNBACK TERMINATION
TENSILE STRENGTH 1770 kN/5q MM DESIGN FACTOR 5/1

Wire Rope Size MM	 Vertical Single Leg	 Choker	Two Leg Slings		 β 0° - 45°	 β 45° - 60°
			β 0° - 45°	β 45° - 60°		
8	0.75	0.60	1.05	0.75	1.55	1.10
10	1.15	0.92	1.60	1.15	2.40	1.70
12	1.70	1.36	2.30	1.70	3.55	2.50
13	2.00	1.60	2.80	2.00	4.15	3.00
14	2.75	1.80	3.15	2.25	4.80	3.40
16	3.00	2.40	4.20	3.00	6.30	4.50
18	3.70	2.96	5.20	3.70	7.80	5.65
20	4.50	3.68	6.50	4.60	9.80	6.90
22	5.65	4.52	7.80	5.65	11.80	8.40
23	6.70	5.36	9.40	6.70	14.00	10.00
26	7.80	6.24	11.00	7.80	16.50	11.50
28	9.00	7.20	12.50	9.00	19.00	13.50
32	11.80	9.44	16.50	11.80	25.00	17.50
34	15.00	12.00	21.00	15.00	31.50	22.50

END FITTINGS



Bow Shackle



Swivel Hook



Eye Hoist Hook.




Eye Self Locking Hook



Swivel Self Locking Hook.

RATED CAPACITIES (t) BASED ON PIN DIAMETER OR HOOK NO LARGER THAN THE NATURAL EYE WIDTH (1/2 X EYE LENGTH) OR LESS THAN THE NOMINAL SLING DIAMETER. TURNBACK EFFICIENCY : K = 0,9 FLEMISH EYE TERMINATION OFFERS A HIGHER EFFICIENCY. REFER TO prEN 13414-1 FOR FULL DETAILS VERTICAL SLING ANGLES GREATER THAN 60° ARE NOT RECOMMENDED!

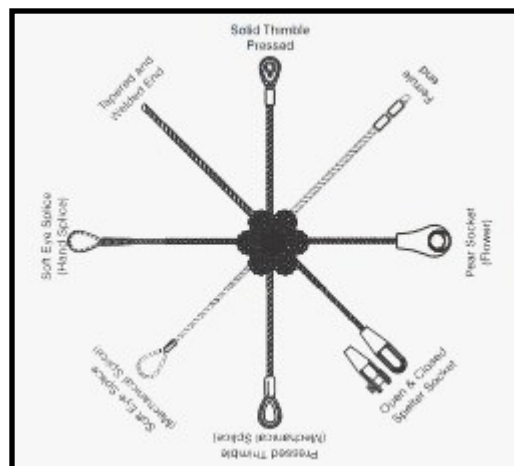

Example of Rope End Terminals

Master links also available in the following varieties



Oval type



Pear shaped