

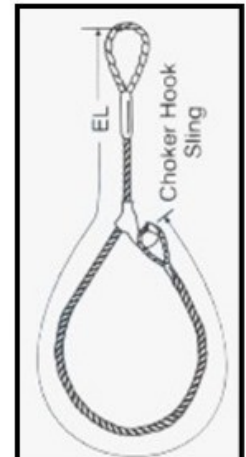
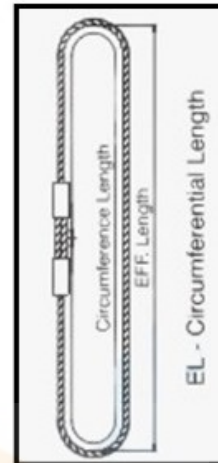
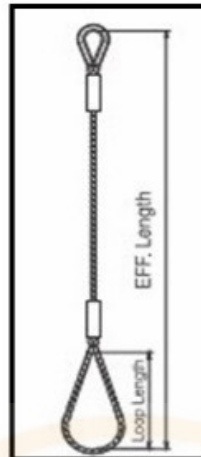


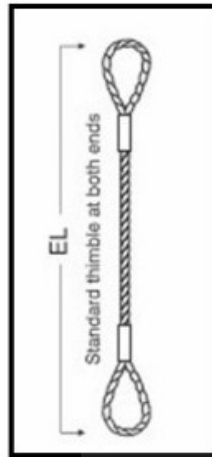


Single Part Slings

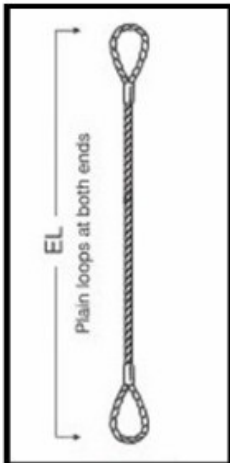

LOOP TYPE SINGLE PART SLINGS

Max. Safe Working Load in Tons for 6 X 19, 6 X 36 Construction

Rope	Fiber Core			Steel Core		
Dia (MM)	Vertical	Basket	Choker	Vertical	Basket	Choker
6	0.4	0.8	0.3	0.5	1.0	0.4
8	0.8	1.5	0.6	0.8	1.7	0.7
9	1.0	2.0	0.8	1.1	2.1	0.8
10	1.2	2.4	1.0	1.3	2.6	1.1
12	1.8	3.5	1.4	1.9	3.8	1.5
13	2.1	4.1	1.6	2.2	4.4	1.8
14	2.4	4.8	1.9	2.6	5.2	2.1
16	3.1	6.2	2.5	3.4	6.7	2.7
18	4.0	7.9	3.2	4.3	8.5	3.4
19	4.4	8.8	3.5	4.8	9.5	3.8
20	4.9	9.7	3.9	5.3	10.5	4.2
22	5.9	11.8	4.7	6.4	12.7	5.1
24	7.0	14.0	5.6	7.2	14.4	5.8
25	7.5	15.0	6.0	7.6	15.2	6.1
26	8.1	16.1	6.4	8.7	17.4	6.9
28	9.3	18.7	7.5	10.1	20.1	8.1
32	12.2	24.4	9.8	13.2	26.3	10.5
35	14.4	28.8	11.5	15.7	31.5	12.6
38	17.6	35.2	14.1	18.6	37.1	14.8
40	18.4	36.9	14.8	20.6	41.1	16.5
44	23.1	46.1	18.4	24.9	49.8	19.9
50	27.4	54.8	21.9	34.8	69.5	27.8
56	37.0	75.0	29.6	40.3	80.7	32.3
64	48.0	96.0	38.4	52.7	105.3	42.1
70	55.0	110.0	44.0	65.0	130.0	52.0

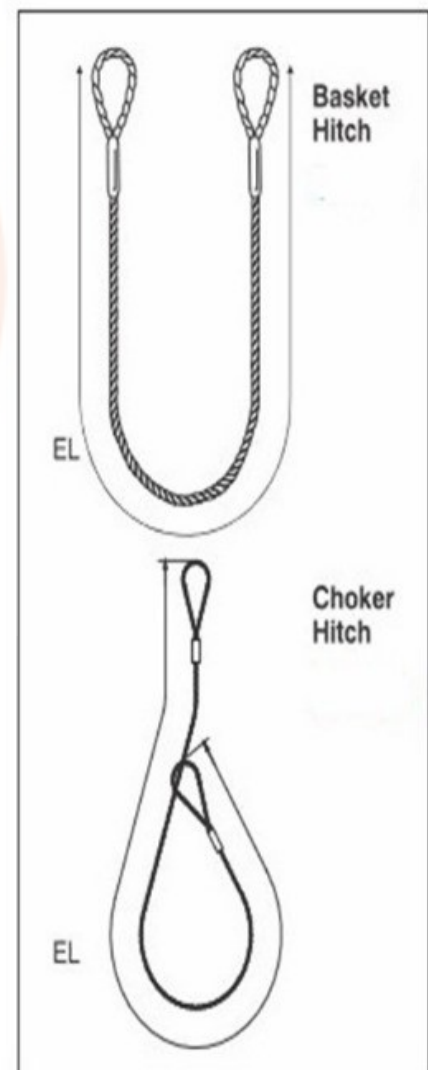

FACTOR OF SAFETY 5:1 TENSILE STRENGTH: 1770/1960 N/Sq. MM

Note: The Capacity indicated in the above table for basket hitch and choker hitch is for guidance only. Vertical column is the actual load the slings can be tested and certified in other words safe working load is applicable for vertical lift only.